




## SERIES 5000 FINE MATERIAL WASHER MODEL 5036-25T Spec Sheet

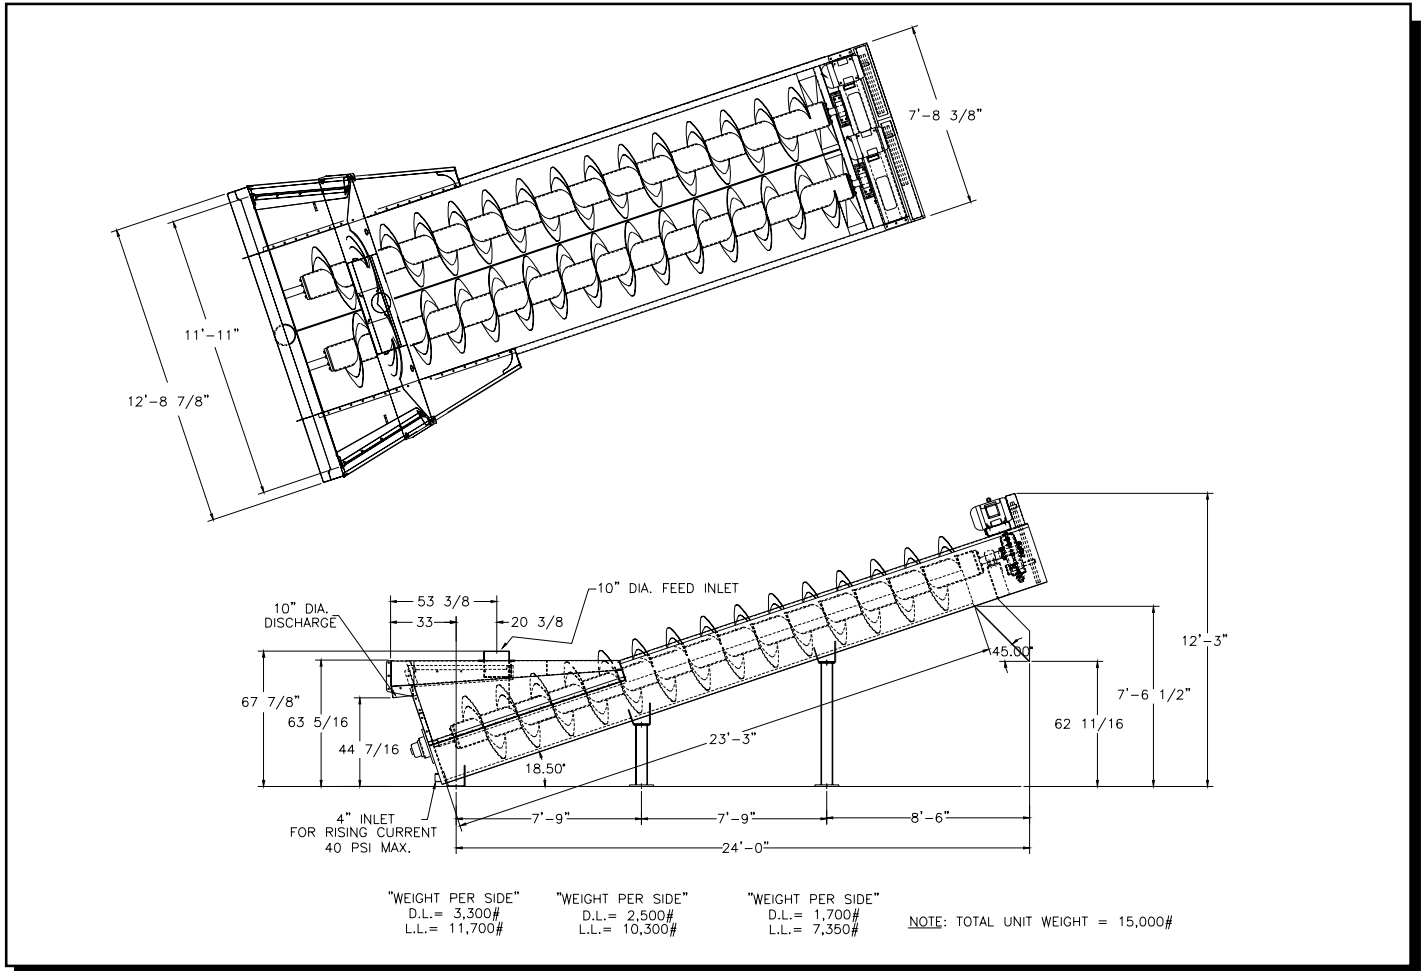

### MAIN TANK:

The tank is of 3/16" (sides & bottom) and 3/8" (lower end plate) welded plate steel construction to eliminate leaks and provide long service life. Additional features of the tank design include: 1) Curved bottom with integral rising current manifolds (single 4" inlet) designed to control fines retention and the water velocity within the pool, 2) Large undisturbed pool area which provides accurate material classification, 3) 19'-9" of adjustable weir boards designed to handle large volumes of slurry and to control the pool level for uniform overflow, 4) 1" chase water line to flush water down the inside of the tank wall to clear the drain trough for better dewatering and 5) Overflow flume with 10" dia. outlet.

### SPIRAL ASSEMBLY:

Heavy wall 12" pipe is the foundation for the double pitch,

solid flight spirals (one right-hand & one left-hand). Steel inner wear shoes and urethane outer wear shoes provide protection of the entire flight and are standard on the Kolberg fine material washer (ni-hard outer wear shoes are optional). A greaseable, externally mounted Dodge flange bearing provides support of each spiral at the lower end of the unit while a greaseable pillow block Dodge bearing provides support at the head end of each spiral. A stainless steel wear sleeve, water tight rubber seal and secondary grease seal prevent leakage and wear on the lower stub shafts for longer service life.

### DRIVE ASSEMBLY:

The high efficiency v-belt drive assembly (one drive assembly per spiral) reduces horsepower requirements for longer motor life and reduced maintenance. Included within each drive assembly is a standard Dodge TA5215H40 double-reduction gear reducer and 15 HP TEFC motor. All that is required to adjust the speed of either spiral is a simple sheave change.

**NOTE:** Specifications are subject to change without notice.

**CENTER FEED BOX:**

Internal and external baffles of the feed box reduce the velocity of the material entering the fine material washer and reduce pool turbulence enhancing the retention of fines.

**DISCHARGE CHUTE:**

The tapered discharge chutes are installed at a 45° angle to grade to ensure material discharge into a stockpile or stacking conveyor.

**SUPPORT ASSEMBLY:**

Independent support structures with 6" wide-flange columns are provided to ensure the sand screw is set at the correct angle for proper operation.

**PHYSICAL/OPERATING CHARACTERISTICS:**

Material: Typically -3/8" sand  
 Angle of Operation: 18.5°  
 Capacity: Up to 200 TPH  
 Speed: Up to 21 rpm  
 Water Requirements: Up to 1200 gpm  
 Dimensions: 27'-8" long x 12'-9" wide x 12'-3" high (in the operating position)  
 Loads: Approx. Dead Load = 15,000 lbs.  
 Approx. Live Load = 58,700 lbs.

**OPTIONAL FEATURES:**

Rising Current Accessories consisting of a 4" butterfly valve and a 4" swing check valve for flow control, 0 - 100 psi pressure gauge and a 1" gate valve for the chase water line.

**NOTE:** Specifications are subject to change without notice.

**RAKING & OVERFLOW CAPACITY TABLE**

CAPACITY (TPH)	% SCREW SPEED (RPM)	SPIRAL SPEED (RPM)	MINIMUM MOTOR HP (TWO REQ'D)	OVERFLOW CAPACITIES (GPM)		
				100 MESH	150 MESH	200 MESH
200	100%	21	15			
150	75%	15	10	1200	600	300
100	50%	12	7.5			
50	25%	6	5			

**PERCENT SCREW SPEED VS. PERCENT FINES IN PRODUCT**

% SCREW SPEED (RPM)	% PASSING 50 MESH	% PASSING 100 MESH	% PASSING 200 MESH
100%	15	2	0
75%	20	5	0
50%	30	10	3
25%	50	25	8

**FOR MORE INFORMATION CALL 1-800-542-9311 AND ASK FOR A KOLBERG EQUIPMENT SPECIALIST.  
 YOUR AUTHORIZED DEALER:**

**KOLBERG-PIONEER, INC.**

700 W. 21st Street - P.O. Box 20  
 Yankton, South Dakota 57078  
 Phone: (605) 665-8771 - FAX: (605) 665-8858  
 mail@kolbergpioneer.com - www.kolbergpioneer.com

Because Kolberg-Pioneer, Inc. may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by Kolberg-Pioneer, Inc. may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of Kolberg-Pioneer, Inc. are subject to the provisions of its standard warranty. Kolberg-Pioneer, Inc. does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety, pollution, electrical wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and the use to which the product is put. A safety study should be made by the user of the application, and, if required additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.